


rond 2.0 retrofit/easyfit/backfit socket type F

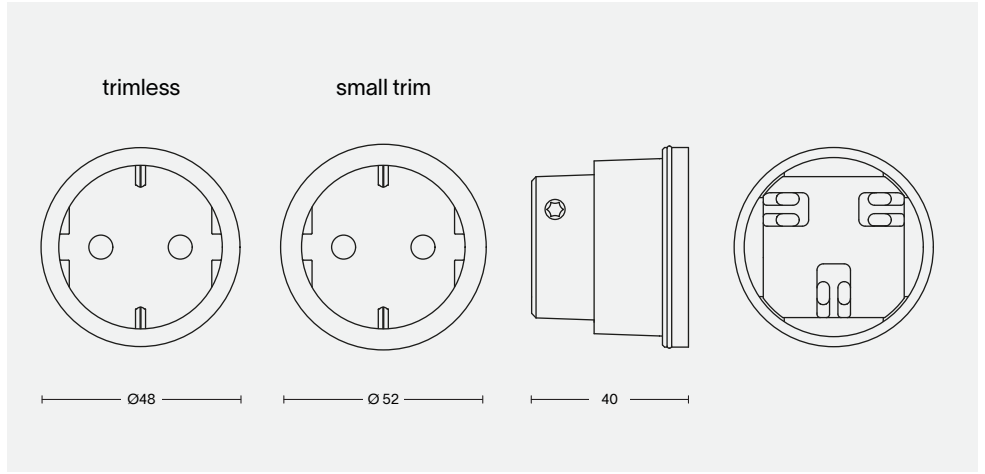

socket specs

application	16A / 250V	
flush-mounting depth	40 mm	
wire stripping length	13.8 mm	
wire capacity	up to 4 x 2.5 mm ² per terminal	
wire fixation	screw terminals (TX8)	
ambient temperature	-5 till +40°C	
IP, IK rating	IP21-D	IK06
marking	CE	

accessories

installation

8800 - 2011	retrofit plaster ring
8800 - 2013	easyfit plaster box - single
8800 - 2014	easyfit plaster box - double
8800 - 2016	backfit holder
8800 - 2010	removal tool

order number

	trimless		small trim	
	black cup	white cup	black cup	white cup
cover ring				
basic black	8888 - 2020	-	8888 - 2052	-
basic white	-	8888 - 2021	-	8888 - 2053
black ano	8888 - 2022	-	8888 - 2054	-
white struc	-	8888 - 2023	-	8888 - 2055
brushed nickel	8888 - 2030	8888 - 2024	8888 - 2062	8888 - 2056
brushed brass	8888 - 2031	8888 - 2025	8888 - 2063	8888 - 2057
light bronze	8888 - 2032	8888 - 2026	8888 - 2064	8888 - 2058
dark bronze	8888 - 2033	8888 - 2027	8888 - 2065	8888 - 2059
canon de fusil light	8888 - 2034	8888 - 2028	8888 - 2066	8888 - 2060
canon de fusil dark	8888 - 2035	8888 - 2029	8888 - 2067	8888 - 2061