


STORM SYSTEM®


The Storm Medium Acoustic Adapter is part of the STORM SYSTEM® collection. A collection that includes a wide range of special designed products.

The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Acoustic adapter makes it possible to install the Storm Medium Plaster Ring in Rockfon® Mono® Acoustic ceilings or other acoustic ceilings.

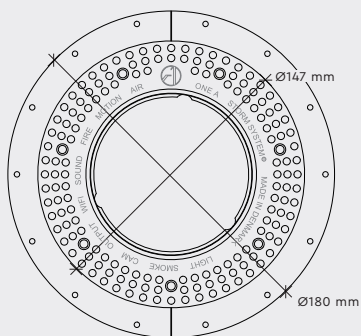

Watch installation video



STORM MEDIUM ACOUSTIC ADAPTER

DATA

Collection	STORM SYSTEM®
Product	Storm Medium Acoustic Adaptor
Article no.	1A01.0091.00

SPECIFICATIONS

Weight	220 g
Material	ABS
Labelling	CE
Load	1,5 kg

ADDITIONAL REQUIREMENTS

Fixture	Product from the STORM SYSTEM® MEDIUM collection
---------	--

NOTE

Always delivered as a set of two. Two halves are needed to complete one installation.

An adapter for Rockfon® Mono® Acoustic ceilings or other acoustic ceilings.

If installing Storm Output, please be aware of the chosen pendant's static load.

The anchoring of Storm Plaster Ring / ceiling must be carried out so that it corresponds with the chosen pendant's load.

IMPORTANT! It is crucial that the qualified personnel – painter or acoustic supplier installing this product, is handed this installation guide and follows it very carefully. Correct execution is paramount to the final result

IMPORTANT INFORMATION


Installation and mounting must be performed by skilled personnel only, and instructions must be followed.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Medium Acoustic Adaptor
- Storm Medium Plaster Ring
- Foam plug
- 7 pcs. 3,5×25 screws




STORM MEDIUM ACOUSTIC ADAPTER

ASSEMBLY INSTRUCTION PAGE 1 OF 2

STEP 1

Cut a round hole with a diameter of 133 mm. Make sure to clean the hole thoroughly, so there is no residue left.

IMPORTANT: Specially on the backside of the board.


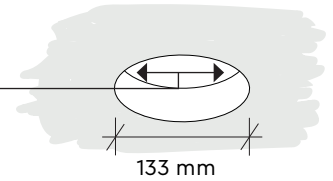


STEP 2

Place the Storm Acoustic Adaptor in the hole, one half at a time.


Make sure that there is an optimal base for a secure attachment.

Attachment must obtain a static load of minimum 1,5kg

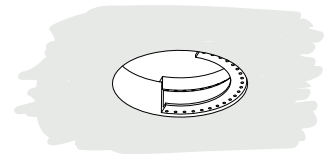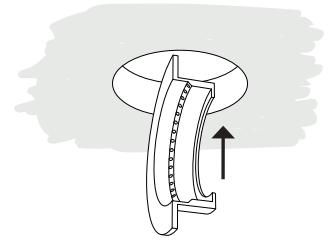


STEP 3

Place the Storm Plaster Ring in the Storm Acoustic Adaptor.

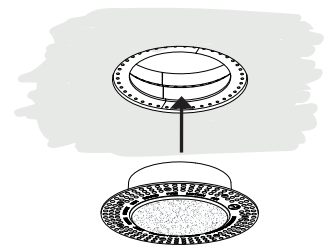

STEP 4

Fasten the Storm Plaster Ring to the acoustic ceiling with the accompanying 7 pcs. 3,5×25 screws

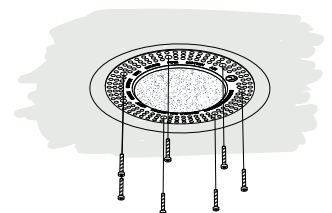

IMPORTANT INFORMATION

Installation and mounting must be performed by skilled personnel only, and instructions must be followed.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

STORM MEDIUM ACOUSTIC ADAPTER



ASSEMBLY INSTRUCTION PAGE 2 OF 2

STEP 5

Level filler with plaster ring edge.

When plastering the ceiling, the foam plug should be placed inside the plaster ring. Exercise caution when plastering to prevent damage of the plastering.

BE AWARE: DO NOT TOUCH THE EDGE OF THE PLASTER RING WHEN SANDING!

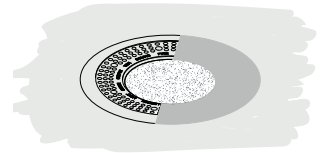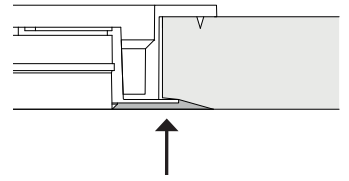

STEP 6

Remove the foam plug when the plastering is finished. Please push the foam plug upwards before removing the plug, the procedure reduces the risk of burrs!

Please note that it is very important that the inside of the plaster ring is kept free of filler and paint. Any residue has to be removed. The plaster ring edge must not be damaged

