


acrojack micro long

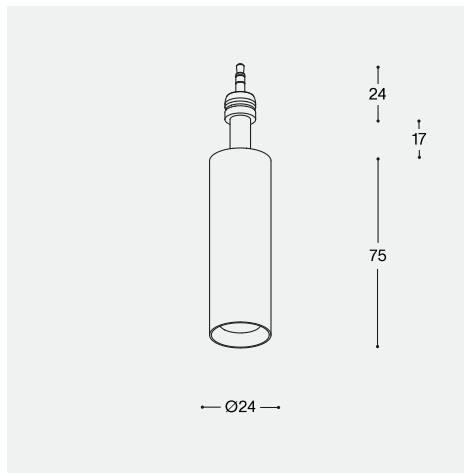

light specs

| | |
|-----------|-------|
| lamp | LED |
| reflector | lens |
| driver | excl. |
| IP | 20 |
| CRI | 97 |
| class | III |

accessories

installation

| | |
|-------------|--------------------------------|
| 8000 - 0006 | plaster ring jack |
| 8000 - 0016 | clt ring jack |
| 8000 - 0098 | trimless tool Ø57 Ø38 jack |

driver

| | |
|-------------|---|
| 8000 - 0032 | DALI 1-10V dimmable driver 55W <small>for micro</small> |
|-------------|---|

luminaire output

| | 2700K | | | 3000K | | |
|---------------|--------|--------|--------|--------|--------|--------|
| | 10° | 30° | 50° | 10° | 30° | 50° |
| 1050mA (3.2W) | 225 lm | 225 lm | 225 lm | 250 lm | 250 lm | 250 lm |
| 1400mA (4.6W) | 250 lm | 250 lm | 250 lm | 300 lm | 300 lm | 300 lm |

order number

| | 2700K | | | 3000K | | |
|--------------|-----------|-----------|-----------|-----------|-----------|-----------|
| | 10° | 30° | 50° | 10° | 30° | 50° |
| black ano. | 8000-3365 | 8000-3477 | 8000-3701 | 8000-3366 | 8000-3478 | 8000-3702 |
| white struc. | 8000-3367 | 8000-3479 | 8000-3703 | 8000-3368 | 8000-3480 | 8000-3704 |