


## light + motion trim

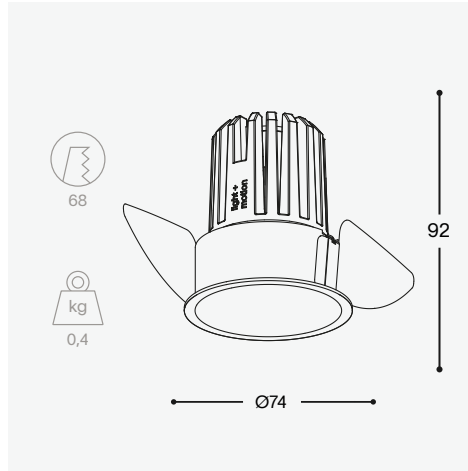

## light specs

<b>lamp</b>	LED
<b>optics</b>	diffusor
<b>driver</b>	excluded
<b>IP</b>	↓ 65 ↑ 20
<b>CRI</b>	90+
<b>class</b>	III

## motion specs

<b>motion detector</b>	passive infrared sensor (PIR)
<b>detection angle</b>	h 360 v 100
<b>light sensor</b>	integrated
<b>master / slave</b>	integrated
<b>adjustability</b>	time - sens - lux
<b>other</b>	patent pending

## accessoires

## installation

<b>8000 - 0003</b>	plaster ring Ø57
<b>8000 - 0013</b>	clt csc ring Ø57
<b>8000 - 2174</b>	master slave connector
<b>8000 - 2175</b>	external potential-free relay

## drivers

<b>8000 - 0029</b>	48V driver 15W constant voltage
<b>8000 - 0024</b>	48V driver 70W constant voltage
<b>8000 - 0025</b>	48V driver 150W constant voltage

## luminaire output

	2700K	3000K	
<b>48V (8.2W)</b>	575 lm	575 lm	(black ano)
<b>48V (8.2W)</b>	725 lm	725 lm	(white struc)

## order number

	2700K	3000K
<b>black ano.</b>	8000 - 2154	8000 - 2155
<b>white struc.</b>	8000 - 2162	8000 - 2163