


## light only short

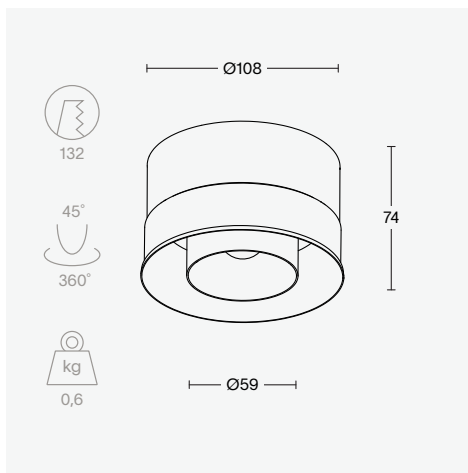

## light specs

lamp	LED
reflector	glass lens
driver	excluded
IP	↓ 65 ↑ 20
CRI	90+
class	III

## accessories

## installation

8000 - 0001	plaster ring Ø108
8000 - 0011	clt csc ring Ø108

## drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

## luminaire output

	2700K			3000K		
	25°	40°	60°	25°	40°	60°
350mA (5.7W)	420 lm	585 lm	585 lm	460 lm	645 lm	645 lm
500mA (8.5W)	555 lm	730 lm	730 lm	610 lm	805 lm	805 lm

## order number

	2700K			3000K		
	25°	40°	60°	25°	40°	60°
black ano.	8000 - 1029	8000 - 2284	8000 - 2285	8000 - 1030	8000 - 2286	8000 - 2287
white struc.	8000 - 1031	8000 - 2292	8000 - 2293	8000 - 1032	8000 - 2294	8000 - 2295