


## light + ventilation trimless SE

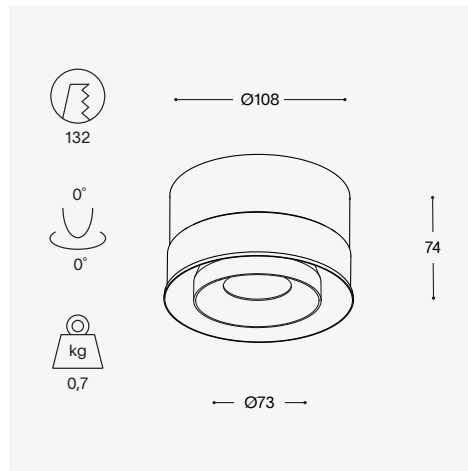

## light specs

lamp	LED
optics	lens
driver	excluded
IP	65
CRI	90+
class	III

## ventilation specs

type	air extraction
air flow	max. 50m <sup>3</sup> /h
pressure	7 - 75 Pa
noise level	< 25 dB(A)
adjustment	32 steps
lock mechanism	integrated

## luminaire output

	2700K		3000K	
	25°	40°	25°	40°
350mA (5.7W)	625 lm	625 lm	675 lm	675 lm
500mA (8.5W)	825 lm	825 lm	875 lm	875 lm


## order number

	2700K		3000K	
	25°	40°	25°	40°
black	8000-1483	8000-2820	8000-1484	8000-2821
white	8000-2146	8000-2822	8000-2147	8000-2823


# light + ventilation trim SE

## ventilation - capacity graphs

### air extraction

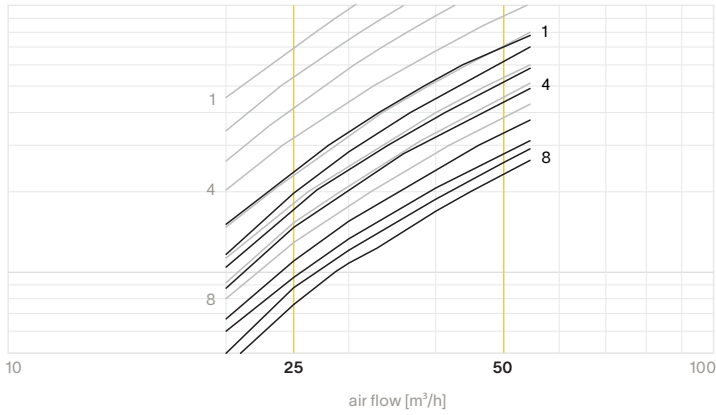

### air supply\*

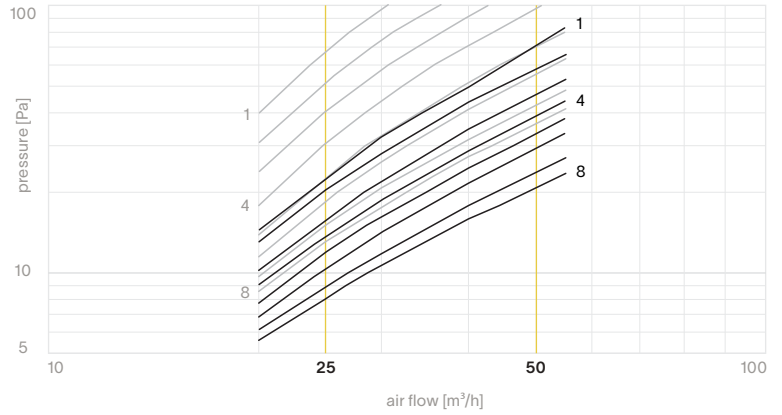

— with 25m³/h ring

— without 25m³/h ring

\*downward airflow not suited for installation in or above comfort zones

## accessoires

### installation

8000 - 0001	plaster ring Ø108
8000 - 0021	clt csc ring Ø108

### drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W