

## CIELO PENDANT LARGE

### FINISH

bronze with handmade fritted glass shade  
satin brass with handmade fritted glass shade

### DIMENSIONS (body of fixture)

ø 385 x 85 mm (dia x h)

### WEIGHT

4.5kg (9.9lbs)  
please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 225 mm  
maximum on request 6205 mm  
supplied with 1000 mm drop rod

### ILLUMINATION

220-240v - integrated LED - 8w - 2700k  
110-130v - integrated LED - 8w - 2700k  
LED driver to be installed in the ceiling rose  
drivers must be installed up to 20 meters from the body of the light


### DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard  
DALI option available (220-240v only)  
0/1-10v (220-240v or 110-130v) - on request


### CEILING ROSE / PLATE

round ceiling rose - ø 45 x 120 mm (dia x h)


### CERTIFICATION

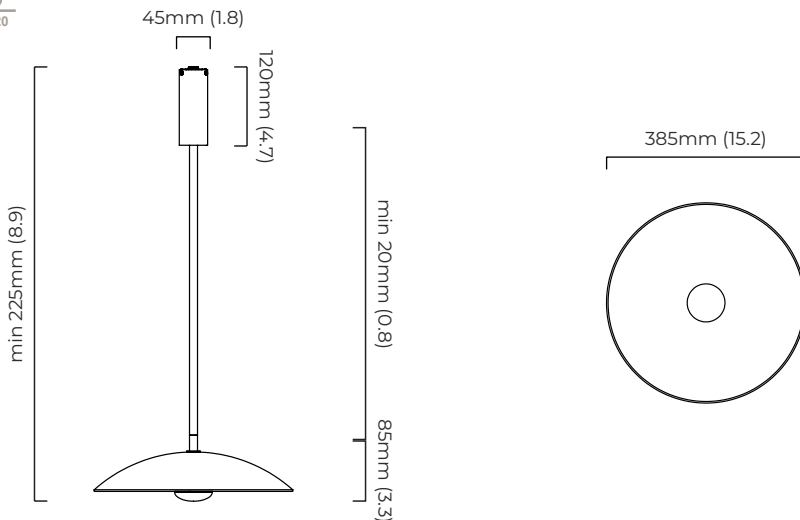

### mounting plate dimensions

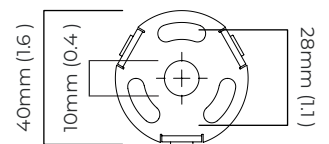

### North America junction box cover

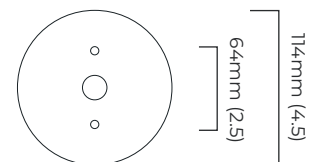

\*Diagrams are not to scale.

| SKU NUMBER     | FINISH DESCRIPTION                            | VOLTAGE    |
|----------------|---|------------|
| CIEPELBZFG-240 | bronze with handmade fritted glass shade      | 220 - 240V |
| CIEPELBZFG-240 | satin brass with handmade fritted glass shade | 220 - 240V |
| CIEPELBZFG-110 | bronze with handmade fritted glass shade      | 110 - 130V |
| CIEPELBZFG-110 | satin brass with handmade fritted glass shade | 110 - 130V |

## CIELO PENDANT LARGE - DALI-A

### FINISH

bronze with handmade fritted glass shade  
satin brass with handmade fritted glass shade

### DIMENSIONS (body of fixture)

ø 385 x 85 mm (dia x h)

### WEIGHT

4.5kg (9.9lbs)

please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 225 mm

maximum on request 6205 mm

supplied with 1000 mm drop rod

### ILLUMINATION

220-240v - integrated LED - 8w - 2700k

DALI LED driver to be installed in the ceiling cavity

drivers must be installed up to 20 meters from the body of the light


### DIMMING

DALI compatible


### CEILING ROSE / PLATE

round ceiling rose - ø 45 x 120 mm (dia x h)


### CERTIFICATION

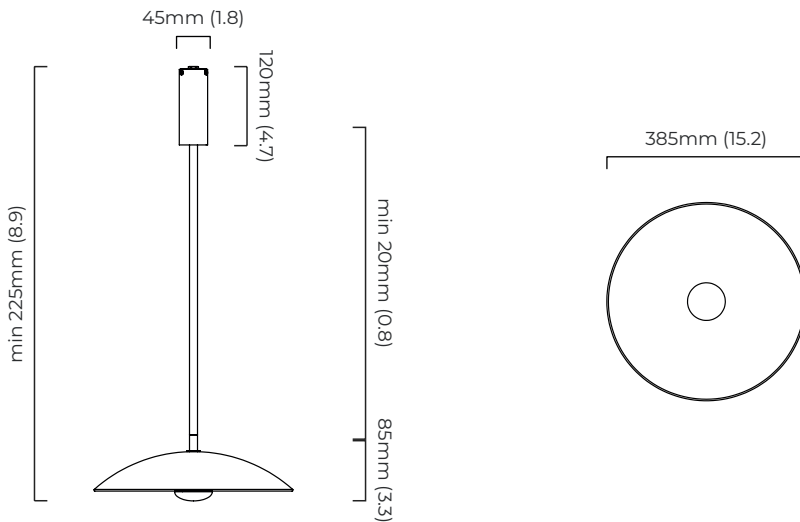

mounting plate dimensions

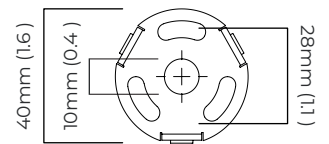

DALI LED driver dimensions

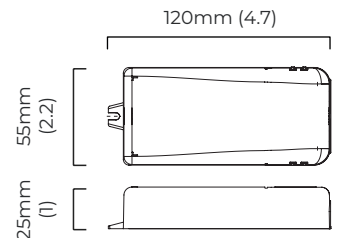

\*Diagrams are not to scale.

| SKU NUMBER           | FINISH DESCRIPTION                            | TYPE OF DALI  | VOLTAGE    |
|----------------------|---|---|------------|
| CIEPELBZFG-DALIA-240 | bronze with handmade fritted glass shade      | DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity | 220 - 240V |
| CIEPELSBFG-DALIA-240 | satin brass with handmade fritted glass shade | DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity | 220 - 240V |

## CIELO PENDANT LARGE - DALI-B

### FINISH

bronze with handmade fritted glass shade  
satin brass with handmade fritted glass shade

### DIMENSIONS (body of fixture)

ø 385 x 85 mm (dia x h)

### WEIGHT

4.5kg (9.9lbs)

please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 140 mm  
maximum on request 6120 mm  
supplied with 1000 mm drop rod

### ILLUMINATION

220-240v - integrated LED - 8w - 2700k  
DALI LED driver to be installed in the ceiling rose



### DIMMING

DALI compatible


### CEILING ROSE / PLATE

round ceiling rose - ø 140 x 35 mm (dia x h)

### CERTIFICATION

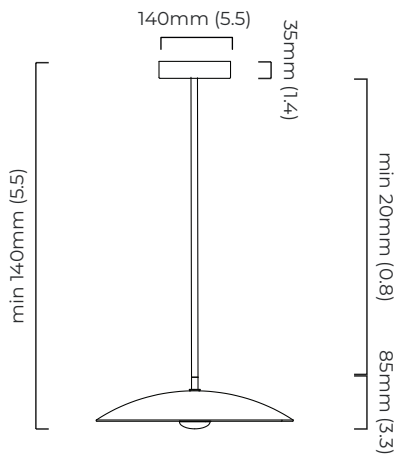

mounting plate dimensions

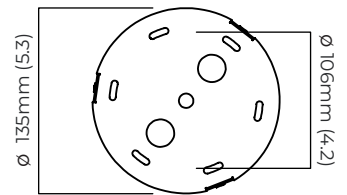

\*Diagrams are not to scale.

| SKU NUMBER           | FINISH DESCRIPTION                            | TYPE OF DALI  | VOLTAGE    |
|----------------------|---|---|------------|
| CIEPELBZFG-DALIB-240 | bronze with handmade fritted glass shade      | DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity | 220 - 240V |
| CIEPELSBFG-DALIB-240 | satin brass with handmade fritted glass shade | DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity | 220 - 240V |