



INSTALLATION MANUAL

L I N

'Cutting through darkness'


L I N Suspension Pendant



Type	Suspension light
Material	Solid brass
Environment	Indoors
Dimensions	500/300 x 125 mm
Cable Length	1500 mm
Stem Length	500 mm
Stem Colour	Polished nickel
Weight	0.4 kg
Certification	IP20 CE
EU/UK	230 V
Ceiling Rose	Ø 80 x 25 mm
Lamps	3 x Linear opal LED S14d*, 3 x 9/6 W, 2700 K, dimmable, 3 x 450/250 lm, energy class A

060 01 101 11

polished nickel with transparent cable

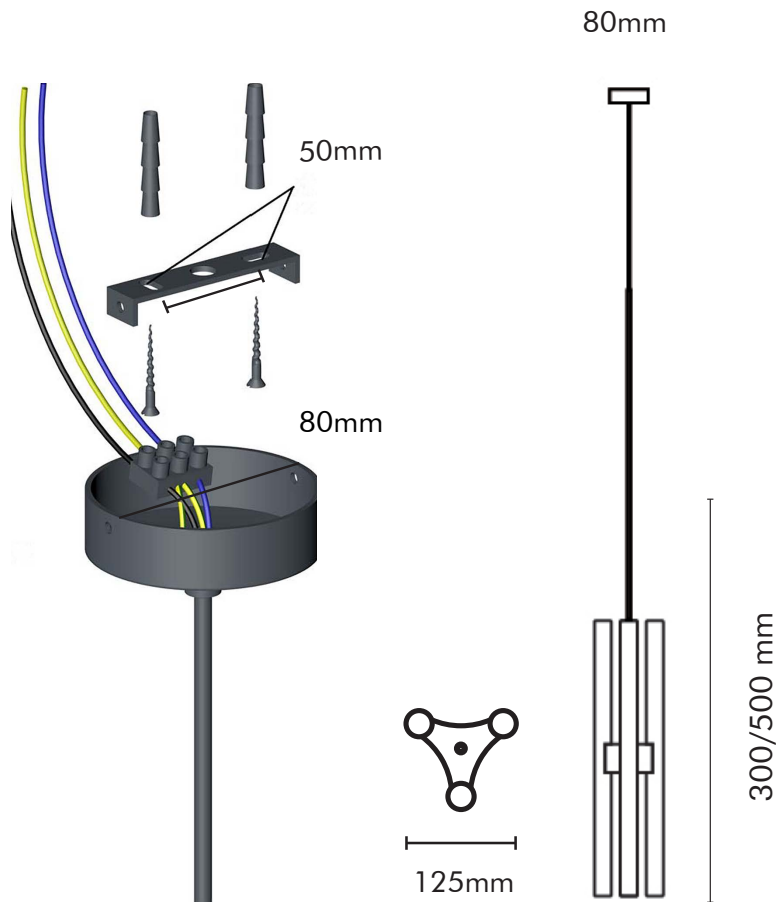

INSTALLATION

Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected .

Installation should be carried out by a qualified electrician.

Ensure all electrical connections are tight with no loose strands, including factory made connections.

The Mains power must only be switched on once the fitting has been electrically connected to the driver.

1. Remove the base from the installation bracket.
2. Affix the bracket to the ceiling with 2 screws (hole size max. 4.5 mm, 50 mm apart).
3. Connect the unit to the mains.
4. Fix the unit back on its base and re-tighten 2 screws on the side.

LAMP INSTALLATION

1. Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected.
2. Use supplied fabric gloves to prevent any stains on the surface of the lamp.
3. Whilst applying pressure push the socket into the lamp holder in the marked place. Remove the lamp from the lamp holder carefully with both hands.
4. Due to risk of glass fracture handle the lamp with care!

Under unfavourable conditions these lamps can lead to acoustic noise. In case of resonance even low noise can cause audible effect. The installation as well as the dimmer or the transformer (harmonics or electronic resonance) are possible influencing factors.

CARE INSTRUCTIONS

1. Use a soft dry cloth to ensure a fingerprint free surface. We recommend the use of micro fibre cloths.
2. Warning: do not use alcohol or other solvents for cleaning.

* Please contact sales@kaia.at for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

www.kaia.at

sales@kaia.at