


light only long

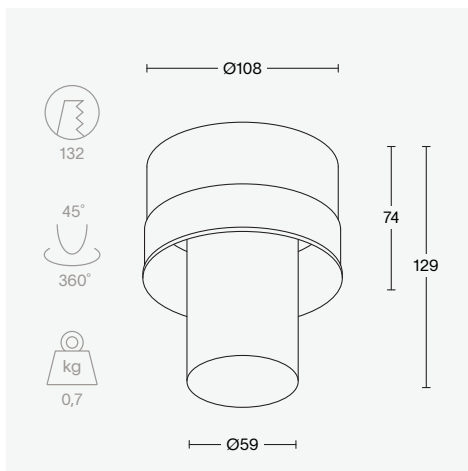

light specs

lamp	LED
reflector	glass lens
driver	excluded
IP	44
CRI	90+
class	III

accessories

installation

8000 - 0001	plaster ring Ø108
8000 - 0011	clt csc ring Ø108

drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	290 lm	420 lm	585 lm	585 lm	325 lm	460 lm	645 lm	645 lm
500mA (8.5W)	450 lm	555 lm	730 lm	730 lm	495 lm	610 lm	805 lm	805 lm
700mA (12.8W)	505 lm	720 lm	955 lm	955 lm	560 lm	795 lm	1055 lm	1055 lm

order number

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
black ano.	8000-1017	8000-1018	8000-1019	8000-2786	8000-1004	8000-1021	8000-1022	8000-2787
white struc.	8000-1023	8000-1024	8000-1025	8000-2788	8000-1026	8000-1027	8000-1028	8000-2789